

**NASA
Technical
Paper
3292**

1992

**ICAN/Damp-Integrated
Composite Analyzer
With Damping Analysis
Capabilities**

Users Manual

Dimitrious A. Saravanos
*Ohio Aerospace Institute
Brook Park, Ohio*

Jose G. Sanfeliz
*Lewis Research Center
Cleveland, Ohio*



National Aeronautics and
Space Administration
Office of Management
Scientific and Technical
Information Program



—

1

1

1

111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 110

11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

11

11

4 5

1

THE UNIVERSITY OF CHICAGO

Abstract

TABLE OF CONTENTS

Summary	1
Introduction	1
Damping Module Overview	1
Background	1
Module Functions	3
Input Data	3
Input Data Requirements	4
ICAN/DAMP Input File	4
Data Bank	8
Output	10
On-axis Damping	10
Off-axis Damping	11
Laminate Damping	11
Temperature Profiles	12
Execution and General Remarks	12
Demonstration Problems	12
Problem 1	12
Problem 2	13
Problem 3	14
Appendix A.—Symbols	16
Appendix B.—Sample ICAN/DAMP Input Data Set	18
Appendix C.—Sample Data Bank	20
Appendix D.—Sample Damping Module Output	24
Appendix E.—Files for Compiling and Executing ICAN/DAMP Under VM/SP Operating System and VAX/VMS Environment	28
Appendix F.—On-Axis Damping, Off-Axis Damping, and Laminate Damping Equations	30
Appendix G.—Damping Module Structure	34
References	35

1

2

3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

Summary

This manual describes the use of the computer code ICAN/DAMP (Integrated Composite Analyzer with Damping Analysis Capabilities) for the prediction of damping in polymer-matrix composites. The code is written in FORTRAN 77 and is a version of ICAN (Integrated Composite ANalyzer) computer program. The code incorporates a new module for synthesizing the materials damping from micromechanics to laminate level. Explicit micromechanics equations based on hysteretic damping are programmed relating the on-axis damping capacities to the fiber and matrix properties and fiber volume ratio. The damping capacities of unidirectional composites subjected to off-axis loading are synthesized from on-axis damping values. The hygrothermal effect on the damping performance of unidirectional composites caused by temperature and moisture variation is modeled along with the damping contributions from interfacial friction between broken fibers and matrix. The temperature rise in continuously vibrating composite plies and composite laminates is also estimated. The ICAN/DAMP users manual provides descriptions of the damping analysis module's functions, structure, input requirements, output interpretation, and execution requirements. It only addresses the changes required to conduct the damping analysis and should be used in conjunction with the "Second Generation Integrated Composite Analyzer (ICAN) Computer Code" users manual.

Introduction

ICAN/DAMP (Damping Analysis of Composite Laminates), a version of the ICAN (refs. 1 and 2) computer code, incorporates a new module for predicting damping in polymer-matrix composites. The new module allows ICAN to synthesize material damping at all scale levels of the composite—from micromechanics to laminate level—thus, providing the required data for simulating the damped vibrational characteristics of composite structures.

This manual provides a step-by-step guide to using the new damping module and only addresses those changes required to conduct the damping analysis. Therefore, users should be familiar with the input requirements and analysis capabilities of the standard ICAN code as described in references 1 and 2. The ICAN/DAMP users manual describes the damping analysis module's functions, structure, input requirements, output interpretation, and execution requirements. The ICAN/DAMP code is compatible with FORTRAN 77 standards; however, the system requirements of various hardware environments may differ, and the user should consult computer support personnel in the event of installation problems. Although the results of the damping module have been sufficiently tested, the user is solely responsible for the interpretation and application of the obtained results. Questions regarding the damping module should be directed to the authors of the manual.

Damping Module Overview

Background

A brief overview of the theoretical background of the damping theory for compos-

ites and fiber composite laminates is discussed in this section. Detailed descriptions of the damping theory, including equations and their application in the analysis, are provided in references 3 and 4. Although some micromechanical damping and laminate damping equations are included in appendix F, we strongly suggest that the user read references 3 and 4 for further understanding of the integrated damping theory.

The damping of composite materials is anisotropic and depends on several micro-mechanical, laminate, and structural parameters. The damping of on-axis composites (unidirectional composites loaded along the material axes as shown in fig. 1(a)) is expressed in terms of six specific damping capacities (SDC), of which only four are independent. These SDC's are defined as the dissipated strain energy of the material over the maximum stored strain energy during one vibration cycle. These SDC's are longitudinal (ψ_{11}), transverse in-plane normal (ψ_{22}), in-plane shear (ψ_{12}), through-the-fibers normal (ψ_{33}), through-the-fibers shear (ψ_{13}), and out-of-plane shear (ψ_{23}). The on-axis SDC's are related to the mechanical properties of the constituents (fiber and matrix), the fiber volume ratio (FVR), temperature, moisture, and existing microdamage (percentage of broken fibers). In addition to the previous parameters, the SDC's of off-axis composites (unidirectional composites loaded at an angle with respect to the fiber direction) depend on the fiber orientation angle (see fig. 1(b)).

The damping of composite laminates includes the damping contributions of all plies. In addition to the previously described parameters affecting on-axis SDC's, the damping of composite laminates depends on ply angles, ply thicknesses, and the overall ply stacking sequence. A unique feature of the encoded theory is its capacity to predict the damping of general laminates as it includes the damping effects of extension, flexure, and extension-flexure coupling. These different sources of laminate damping are best described by the extensional $[A_D]$, flexural $[D_D]$, and extension-flexure coupling $[C_D]$ damping matrices. The overall damping capacity of a composite laminate is related to these three damping matrices and the local deformation expressed by midplane strains and curvatures.

Increased temperatures may be observed in vibrating composite laminates as a

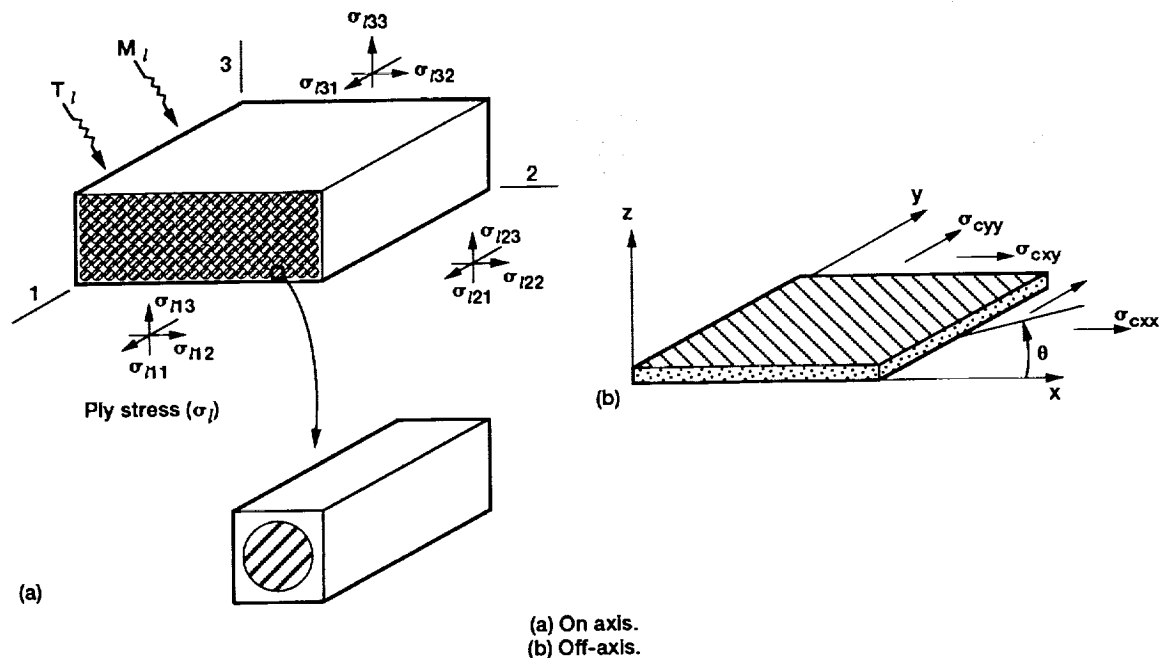


Figure 1.—Unidirectional composites.

result of strain-energy dissipation, including the friction effects. It is well known that damping represents the strain/kinetic energy losses that are dissipated in the composite material in the form of heat. For extended periods of vibration, it is possible that a significant temperature rise may occur, which affects such mechanical properties of the laminate as stiffness and strength. It is desirable, then, to predict both the temperature rise in composite laminates during prolonged vibrations, and its effect on the mechanical properties. The damping module provides this capability by calculating the temperature profiles developed through the thickness of the vibrating laminate.

Module Functions

The present module was developed for analyzing the damping capacity of unidirectional composites and/or composite laminates. The modeling of damping is performed in two levels: (1) the micromechanics level, where the SDC's of unidirectional on-axis composites and/or off-axis composites are synthesized, and (2) the laminate level, where the damping capacity of composite laminates is calculated.

The input information for the damping analysis requires additional card groups to control the output of the module and to provide additional input parameters. These damping analysis card groups are part of the input data file of the main ICAN code. Detailed descriptions of the damping analysis card groups are provided in the "Input Data" section of this manual. In addition to the damping analysis card groups, the module uses the standard input parameters previously available through the ICAN input file. These parameters are

- (1) Data defining the laminate configuration and environmental conditions such as ply angles, ply thicknesses, ply composite materials, ply cure temperature, ply use temperature, and ply moisture content

- (2) Definition of the basic composite material systems in terms of fiber volume ratios (FVR's), fiber material, and matrix material

- (3) Mechanical loads applied on the laminate.

Details of these parameters are addressed in the input data sections of the ICAN user's manuals (refs. 1 and 2).

The properties of the fibers and matrix for each composite material, including specific damping capacities, are provided in a separate data base of material properties (see appendix C). The user can easily incorporate additional constituent materials based on need. A detailed description of the material data base is included in the "Data Bank" section of this manual.

The calculated SDC's of the constituent (fiber and matrix) materials, the composite plies, and the composite laminate, and the resultant temperature profiles through the thickness of the laminate are printed in a separate section of the output file. Details about the damping analysis output are given in the output section of this manual. Also, a brief description of the damping module's subroutines is given in appendix G.

Input Data

Input to the damping module is provided by two files: (1) the ICAN/DAMP input data file and (2) the constituent materials data base. Typical examples of these files are shown in appendices B and C, respectively.

Input Data Requirements

The following input parameters are used by the damping module. This information should be known by the user before executing the code. These parameters are

(1) Data defining the laminate configuration and environmental conditions such as ply angles, ply thicknesses, ply composite materials, ply cure temperature, ply use temperature, and ply moisture content

(2) Definition of the basic composite material systems in terms of fiber volume ratios (FVR's), fiber material, and matrix material

(3) Mechanical loads applied on the laminate

(4) Properties of the fibers and matrix for each composite material, including specific damping capacities.

Optional input data parameters may be needed for the damping analysis as explained in the following subsections. Optional input may include

(1) Amplitudes of cyclic mechanical loads (or laminate strains) applied on the laminate and the corresponding forcing frequency. The mechanical loads will affect only the equivalent laminate damping, temperature rise, and friction results.

(2) Data describing the percentage of broken fibers and friction coefficients if friction damping contributions due to broken fibers are requested.

ICAN/DAMP Input File

The data cards of the input file are summarized in table I. The ICAN/DAMP input file is divided in two data sections. The first section is the standard ICAN input described in reference 2 and table I. Again, it is suggested that the user consult reference 2 for descriptions of other cards included in the input data file. The second data section incorporates the damping analysis card groups as shown in appendix B. The following is a detailed description of the damping analysis card groups with examples taken from appendix B.

Damping option card group V. — This set of three cards controls various options of the damping module:

Damping option value			Optional description					
-1-	-2-	-3-	-4-	-5-	-6-	-7-	-8-	-9-
-----	-----	-----	-----	-----	-----	-----	-----	-----
FRICTN	0	IF:	1	Include Friction Effects				
TEMPRIS	0		1	Temp's from Individual Ply Heat Generation				
DAMP-OUT	0		1	Suspends Damping's Output Printout				

Each card has a format (8X,I8) beginning with "FRICTN", "TEMPRIS", and "DAMP-OUT" as their first entry, followed by the damping option value under field -2-. The default values of the integer flags are 0. These flag values have the following functions:

(1) FRICTN = 1: The friction effects on damping due to broken fibers is included; otherwise, it is neglected (FRICTN = 0). (The default value of FRICTN is 0).

(2) TEMPRIS = 1: The temperature rise is obtained from calculations of the dissipated strain energy in each ply; otherwise, the temperature profiles are calculated from the average laminate dissipated energy default value of TEMPRIS = 0.

(3) DAMP-OUT = 1: The printout of the damping output is suspended.

TABLE I.—SUMMARY OF DETAILS FOR PREPARING ICAN/DAMP INPUT DATA CARDS

Card group	Identification	Code symbol	Number of entries	List of entries	Card field columns	Format	Comments
1	Title card	TITLE	80	Alphabetic character	1 to 80	(10A8)	-----
2	Booleans	COMSAT	1		1 to 16	(A8,L8)	T(true) if laminate analysis is desired; otherwise F (false)
		CSANB	1		"		T (true) if symmetry exists; otherwise F (false)
		BIDE	1		"		T (true) if interply contributions are desired; otherwise F (false)
		RINDV	1		"		T (true) if disps. are input; otherwise F (false)
		NONUDF	1		"		T (true) if Poisson's ratio differences chart is not desired; otherwise F (false)
		DEFECT	1		"		T (true) if durability analysis with defect is desired; otherwise F (false)
3	Ply (ply desired)	INP1,IP1, TU, TCU, DELM, TETA, THCKNS	7	i, j, T_u , T_{cu} , ΔM , θ_1 , t_1	1 to 64	(A8,2I8, 5F8.3)	Ply layup, temperature and moisture conditions
4	MATCRD (material)	IP1, CODES (1,1,J), CODES (1,2,J), VFP, VVP, CODES (2,1,J), CODES (2,2,J), VFS, VVS, VSC	8	Primary composite code names for fiber and matrix, k_f , k_v ; secondary composite code names for fiber and matrix k_{sc} , k_f , k_v	1 to 72	(A8,I8, 2A4, 2E8.2, 2A4, 3E8.2)	Descriptions of the material system to be used

TABLE I.—Concluded.

Card group	Identification	Code symbol	Number of entries	List of entries	Card field columns	Format	Comments
5	FRICTN	IOPT(1)	1	0 (Default value) or 1	1 to 16	(8X,I8)	Integer flag to include friction due to broken fibers
	TEMPRI	IOPT(2)	1	"	"	"	Integer flag to include temperature rise from individual ply heat generation
	DAMPOUT	IOPT(3)	1	"	"	"	Integer flag to suspend the damping's output printout
6	FREQ	FREQ	1	f	1 to 16	(8X,F8.3)	Forcing frequency in hertz
7	STRAINS	E0(1),E0(2), E0(3)	3	$\epsilon_x, \epsilon_y, \gamma_{xy}$	1 to 32	(8X,3F8.3)	User-defined mid-plane strains for the damping analysis
	CURVTUR	CURV(1), CURV(2), CURV(3)	3	$\kappa_x, \kappa_y, \kappa_{xy}$	1 to 32	"	User-defined curvatures for the damping analysis
8	PLY (Same mnemonic as in card group 3)	IL,MU, KFB	3	i, μ , N_{fb}	1 to 32	(8X, I8, 2F8.3)	Ply identification number, fiber/matrix friction coefficient and fraction of broken fibers in a ply
9	PMEMB	NX,NY, NXY, THCS	4	N_x, N_y, N_{xy}, O_{cs}	1 to 40	(A8, 4E8.4)	Membrane loads and angle to structural axis
	PBEND	MX,MY, MXY	3	M_x, M_y, M_{xy}	1 to 32	"	Bending loads
	PTRAN	DMX, DMY, PU,PL	4	Q_{xy}, Q_{yz}, P_u, P_l	1 to 40	"	Traverse loads
10	Cyclic loads cards	CNXX, CNYY, CNXY CMXX, CMYY, CMXY	4	Upper limit, lower limit, No. cyc. and β_1	1 to 40	(A8,4E8.4)	Description of cyclic loads
11	PRINT (output option cards)	IDECHO, INPTSUM, ----- ----- ALL	1		1 to 16	(2A8)	Select output items

Forcing frequency: card group VI. — The card in this group has a format (8X,F8.3) beginning with the mnemonic "FREQ" as the first entry and is followed by the value of the forcing frequency f (in hertz) as its second entry:

Frequency value	
-1-	-2-
----- -----	
FREQ	50.0

Note that the laminate loads in the input are considered in the damping analysis as amplitudes of cyclic loads of frequency f , which are used in the calculation of the equivalent laminate SDC. Even though this frequency value is needed only for the calculation of the temperature profiles, the presence of a forcing frequency card is required in the input file. For this example, the forcing frequency is equal to 50.0 Hz.

Deformation: card group VII. — These two cards provide the option to calculate the laminate damping and temperature profiles for a user-defined harmonic laminate deformation (expressed by the midplane strain and curvature amplitudes) of frequency f :

	ϵ_x	ϵ_y	γ_{xy}
-1-	-2-	-3-	-4-
----- ----- ----- -----			
STRAINS	0.0	0.0	0.0

	κ_x	κ_y	κ_{xy}
-1-	-2-	-3-	-4-
----- ----- ----- -----			
CURVTUR	0.0	0.0	0.0

In the default option, the laminate deformation is calculated from the sinusoidal load of frequency f defined in the loads card group. The default option is assumed when all entries in the previous two cards are set equal to 0.0 (as in this example). The format of each card is (8X,3F8.3).

The entries for the midplane strains begin with the mnemonic "STRAINS" as the first entry under field -1-, followed by three real entries consisting of the prescribed values of ϵ_x , ϵ_y , and γ_{xy} , respectively. Each real field is entered in format F8.3. The entries for the curvature card begin with the mnemonic "CURVTUR," followed by the values of κ_x , κ_y , and κ_{xy} , entered also in format F8.3.

Friction data: card group VIII. — The last group of cards in the damping analysis input file consists of friction data for each ply used in the calculation of friction damping due to broken fibers.

	Ply id	μ	N_{fb}
-1-	-2-	-3-	-4-
-----	-----	-----	-----
PLY	1	0.30	0.20
PLY	2	0.30	0.20
PLY	3	0.30	0.20
PLY	4	0.30	0.20
PLY	5	0.30	0.20
PLY	6	0.30	0.20
PLY	7	0.30	0.20
PLY	8	0.30	0.20

The format of each card is (8X,I8,2F8.3) and consists of the ply identification number (second entry), the friction coefficient between matrix and fibers (μ) for the ply (third entry), and the fraction of broken to total fibers (N_{fb}) in the ply (fourth entry). The friction effects are accounted for on the laminate SDC, and the programmed formulation is valid for uniaxial cyclic stress only. It is assumed that the modulus of the composite does not change with the percentage of broken fibers. Therefore, the stiffness of the ply/laminate will not be affected. The ply identification numbers should be in sequential order starting from 1, and the values of μ and N_{fb} should be specified for each ply. The number of plies in this card group should match the number of plies specified in the laminate configuration card group. The values for μ and N_{fb} used in the example are $\mu = 0.30$ and $N_{fb} = 0.20$. This option is activated through the damping option card group by setting FRICTN = 1.

Data Bank

A sample data base of constituent properties is provided with the source code to facilitate the user's initial interaction with the program. After getting acquainted with the damping module, the user may want to expand the data bank of constituent properties based on his/her specific applications. Among other things, the resident data bank reduces the burden of repeatedly preparing input for the fiber and matrix properties. The data bank is structured in the same way as described in the "Second Generation ICAN Computer Code Users Manual" (ref. 2). This section is written with the assumption that the user is already familiar with ICAN's revised data bank structure and features; therefore, only the additional cards will be discussed. The additions to this data bank consist of the fiber and matrix damping capacities cards necessary for the damping analysis. These additional cards are described below.

Fiber material properties. — There are four additional cards that were added to the block of fiber properties, corresponding to their specific damping capacities in the longitudinal (ψ_{f11}), shear (ψ_{f12}), and transverse directions (ψ_{f22} , ψ_{f23}). These four cards are included after the property fiber compressive strength, and their numerical values are entered starting from column 42 in format E9.3. This will increase the total number of cards in the fiber properties "block" to 24. An example of the fiber properties with the additional fiber damping capacities cards (identified by bold print) is shown in the following table:

Description				Symbol	Value	Units	
-1-	-2-	-3-	-4-	-5-	-6-	-7-	-8-
-----	-----	-----	-----	-----	-----	-----	-----
HMSF HIGH MODULUS SURFACE TREATED FIBER.							
\$							
\$							
\$							
Number of fibers per end				Nf	10000	number	
Filament equivalent diameter				df	0.300E-03	inches	
Weight density				Rhof	0.703E-01	lb/in**3	
Normal moduli (11)				Ef11	0.550E+08	psi	
Normal moduli (22)				Ef22	0.900E+06	psi	
Poisson's ratio (12)				Nuf12	0.200E+00	non-dim	
Poisson's ratio (23)				Nuf23	0.250E+00	non-dim	
Shear moduli (12)				Gf12	0.110E+07	psi	
Shear moduli (23)				Gf23	0.700E+06	psi	
Thermal expansion coef. (11)				Alfaf11	-.550E-06	in/in/F	
Thermal expansion coef. (22)				Alfaf22	0.560E-05	in/in/F	
Heat conductivity (11)				Kf11	0.403E+01	BTU-in/hr/in**2/F	
Heat conductivity (22)				Kf22	0.403E+00	BTU-in/hr/in**2/F	
Heat capacity				Cf	0.170E+00	BTU/lb/F	
Fiber tensile strength				SfT	0.280E+06	psi	
Fiber compressive strength				SfC	0.200E+06	psi	
Fiber damping capacity (11)				Zetaf11	0.400E-02	non-dim	
Fiber damping capacity (22)				Zetaf22	0.400E-02	non-dim	
Fiber damping capacity (12)				Zetaf12	0.400E-02	non-dim	
Fiber damping capacity (23)				Zetaf23	0.400E-02	non-dim	

Matrix material properties. — Two additional cards were included in the block of matrix properties. These cards correspond to the matrix normal (ψ_{nn}) and shear (ψ_{ns}) specific damping capacities, which are included after the property glass transition temperature. Again, the numerical values are entered starting from column 42 in format E9.3. The total number of cards in this block of matrix properties increased to 21. An example depicting the matrix properties available in the data bank is shown in the list below:

Description	Symbol	Value	Units
-1- -2- -3- -4- -5- -6- -7- -8-			
----- ----- ----- ----- ----- ----- ----- -----			
D210 DX210 RESIN.			
\$			
\$			
\$			
Weight density	Rhom	0.440E-01	lb/in**3
Normal modulus	Em	0.500E+06	psi
Poisson's ratio	Num	0.350E+00	non-dim
Thermal expansion coef.	Alfa m	0.360E-04	in/in/F
Matrix heat conductivity	Km	0.868E-02	BTU-in/hr/in**2/F
Heat capacity	Cm	0.250E+00	BTU/lb/F
Matrix tensile strength	SmT	0.150E+05	psi
Matrix compressive strength	SmC	0.350E+05	psi
Matrix shear strength	SmS	0.130E+05	psi
Allowable tensile strain	eps mT	0.200E-01	in/in
Allowable compr. strain	eps mC	0.500E-01	in/in
Allowable shear strain	eps mS	0.350E-01	in/in
Allowable torsional strain	eps mTOR	0.350E-01	in/in
Void heat conductivity	kv	0.225E+00	BTU-in/hr/in**2/F
Glass transition temperature	Tgdr	0.420E+03	F
Matrix damp. capacity-Normal	Zeta mn	0.103E+00	non-dim
Matrix damp. capacity-Shear	Zeta ms	0.118E+00	non-dim

Output

The output is organized in four sections describing (1) the on-axis damping SDC's of each composite material, (2) the off-axis SDC's of each ply, (3) the equivalent damping characteristics of the laminate, and (4) the calculated temperature profiles. A typical output sample is provided in appendix D. More analytical descriptions of the damping output section are given in the following sections:

On-axis Damping

This portion of the output provides details of the on-axis SDC's of each composite material under a use temperature and moisture content. The following SDC's of the fibers, matrix, and the composite material are obtained:

Specific Damping Capacities		
Fiber	Matrix	Composite
ZF11 = ψ_{f11}	ZMN = ψ_{mn}	ZL11 = ψ_{l11}
ZF12 = ψ_{f12}	ZMS = ψ_{ms}	ZL12 = ψ_{l12}
ZF13 = ψ_{f13}		ZL13 = ψ_{l13}
ZF22 = ψ_{f22}		ZL21 = ψ_{l21}
ZF23 = ψ_{f23}		ZL22 = ψ_{l22}
ZF33 = ψ_{f33}		ZL23 = ψ_{l23}
		ZL31 = ψ_{l31}
		ZL32 = ψ_{l32}
		ZL33 = ψ_{l33}

Off-axis Damping

The off-axis damping matrix and the axial damping with respect to the structural axes (x,y) of each ply are printed out. The axial SDC's represent the global damping of the ply when it is subjected to uniaxial cyclic normal and shear stress in the x-y plane (ref. 3).

Damping Matrix Terms	Axial Damping
$ZC(1,1) = \psi_{c_{xx}}$ $ZC(1,2) = \psi_{c_{xy}}$ $ZC(1,3) = \psi_{c_{xs}}$ $ZC(2,1) = \psi_{c_{yx}}$ $ZC(2,2) = \psi_{c_{yy}}$ $ZC(2,3) = \psi_{c_{ys}}$ $ZC(3,1) = \psi_{c_{sx}}$ $ZC(3,2) = \psi_{c_{sy}}$ $ZC(3,3) = \psi_{c_{ss}}$	$ZCAXLX = \psi_{x,axial}$ $ZCAXLY = \psi_{y,axial}$ $ZCAXLS = \psi_{s,axial}$

Laminate Damping

This section of the output provides data related to the total damping capacity of the laminate. The laminate's midplane strain and curvature are first printed, followed by the equivalent SDC of the laminate, the dissipated strain energy per unit area, and the maximum stored strain energy per unit area. These values are all related to the previously mentioned generalized laminate strains.

Laminate mechanical strains	
Midplane strains	Curvature
$E01 = \epsilon_x$ $E02 = \epsilon_y$ $E03 = \gamma_{xy}$	$K1 = \kappa_x$ $K2 = \kappa_y$ $K3 = \kappa_{xy}$

SDC of laminate for above strains	$\psi = \delta W/W$
Dissipated strain energy	δW
Stored strain energy	W

The laminate damping matrices $[A_D]$, $[D_D]$, and $[C_D]$ representing, respectively, the laminate damping capacities in extension, flexure, and extension-flexure action are also provided in this output section.

Laminate Damping Matrices								
Extensional Damping $[A_D]$			Coupling Damping $[C_D]$			Flexural Damping $[D_D]$		
ACD(1,1)	...	ACD(1,3)	CCD(1,1)	...	CCD(1,3)	DCD(1,1)	...	DCD(1,3)
ACD(2,1)	...	ACD(2,3)	CCD(2,1)	...	CCD(2,3)	DCD(2,1)	...	DCD(2,3)
ACD(3,1)	...	ACD(3,3)	CCD(3,1)	...	CCD(3,3)	DCD(3,1)	...	DCD(3,3)

Temperature Profiles

The developed temperature differentials in each ply of the vibrating laminate due to the dissipated strain energy are provided in this output portion. The initial temperature, the average temperature differential, and the temperature differential at the bottom and top of the ply are printed for each ply. Currently, the heat dissipation is being done by heat conduction through the material. The air convection rate is neglected at this time.

Execution and General Remarks

ICAN/DAMP has been compiled using a variety of Fortran 77 compilers on hardware ranging from microcomputers to supercomputers with relative ease; therefore, it is not foreseen that the user would have any great difficulty compiling the code. ICAN/DAMP was primarily compiled and executed on the VM/SP operating system, residing in an Amdahl 5870 mainframe computer at NASA Lewis Research Center. The same REXX EXEC files that compile and run the ICAN code under the VM system are applicable to the ICAN/DAMP code. The input and output files are associated to the following I/O units:

- (1) ICAN/DAMP input file I/O unit 5
- (2) Data bank file I/O unit 8
- (3) ICAN/DAMP output file I/O unit 6

These JCL (job control language) files are shown in appendix E. Also, a DCL (digital command language) command procedures file is provided to execute the code in a VAX/VMS environment.

Demonstration Problems

In addition to the input file, the following demonstration problems are also provided in order to aid the user in becoming familiar with some of the code's features and capabilities.

Problem 1

This problem illustrates the interfacial frictional damping contribution caused by broken fibers in an off-axis composite. A two-ply, 0.02-in.-thick continuous-fiber composite is

subjected to an off-axis, axial stress amplitude σ_{cxx} of 20 ksi ($N_x = 400$ lb/in.). The composite is made of HMSF (high modulus surface treated graphite fibers) and IMHS (intermediate modulus high strength) matrix with a 0.50 fiber volume ratio. The coefficient of friction between fiber and matrix was assumed to be 0.30; the percentage of broken fibers per ply to equal 20 percent; and the fiber orientation angle θ_1 to be 20 . The input data set for this problem is given below:

```

$
$ This problem illustrates the interfacial frictional damping
$ contribution in the case of off-axis loading.
$
ICAN/DAMP: Demonstration Problem No. 1
  COMSAT      T
  CSANB       F
  BIDE        F
  RINDV       F
  NONUDF      T
  DEFECT      F
$ The composite is 0.02 inches thick and the fiber orientation
$ angle is equal to 20 degrees.
  PLY         1         1      70.0      70.0      0.0      20.0      0.01
  PLY         2         1      70.0      70.0      0.0      20.0      0.01
$ HMSF fiber in Intermediate Modulus High Strength matrix (IMHS).
  MATCRD      IHMSFIMHS      0.50      0.00T300IHMS      0.00      0.00      0.00
$ Friction effect is considered in this problem.
  FRICTN      1      IF: 1 - Include Friction Effects
  TEMPRIS      0      1 - Temp's from Individual Ply Heat Generation
  DAMPOUT      0      1 - Suspends Damping's Output Printout
  FREQ        50.0
  STRAINS      0.0      0.0      0.0
  CURVTUR      0.0      0.0      0.0
$ Coefficient of friction is equal to 0.30 and the percentage of
$ broken fibers is equal to 20 %.
  PLY         1      0.30      0.20
  PLY         2      0.30      0.20
$ Axial stress amplitude of 20 ksi, (In-plane Loads Only).
  FMEMB      400.0      00.      0.0      0.0
  PBEND      0.0      0.0      0.0      0.0
  PTRAN      0.0      0.0      0.      00.
$
  PRINT      ALL      Output request for complete results      (OPTION 0)

```

Problem 2

This problem includes the temperature rise option based on the individual strain energy dissipation per ply. The off-axis composite is a HT-S fiber/IMHS matrix with a 0.50 fiber volume ratio, subjected to a continuous sinusoidal excitation of σ_{cxx} equal to 10 ksi and a frequency of 50 Hz. The thickness of the unidirectional composite is 0.04 in., hence, N_x equals 400 lb/in., and the fiber orientation angle, θ_1 , equals 60 . Friction effects from broken fibers are ignored (FRICTN = 0). The input data file is listed below:

```

$
$ The temperature rise based on the individual strain energy
$ dissipation per ply is considered in this example. The temperature
$ difference is measured versus the room temperature of 70 degrees F.
$
ICAN/DAMP: Demonstration Problem No. 2
COMSAT      T
CSANE       F
BIDE        F
RINDV       F
NONUDEF     T
DEFECT      F
$ The composite is 0.04 inches thick and the fiber orientation
$ angle is equal to 60 degrees.
PLY         1         1      70.0      70.0      0.0      60.0      0.02
PLY         2         1      70.0      70.0      0.0      60.0      0.02
$ HT-S fiber in Intermediate Modulus High Strength matrix (IMHS).
MATCRD      1HT-SIMHS      0.50      0.00T300IMHS      0.00      0.00      0.00
FRICTN      0      IF: 1 - Include Friction Effects
TEMPRIS      1         1 - Temp's from Individual Ply Heat Generation
DAMPOUT      0         1 - Suspends Damping's Output Printout
$ Frequency is equal to 50 Hz.
FREQ        50.0
STRAINS      0.0      0.0      0.0
CURVTUR      0.0      0.0      0.0
PLY          1      0.00      0.00
PLY          2      0.00      0.00
$ Axial stress amplitude of 10 ksi, (In-plane Loads Only).
PMEMB      400.0      00.      0.0      0.0
PBEND      0.0      0.0      0.0      0.0
PTRAN      0.0      0.0      0.      00.
$
PRINT      ALL      Output request for complete results      (OPTION 0)

```

Problem 3

The variations of temperature and moisture will influence the damping performance of composite laminates. These hygrothermal effects on the flexural SDC of a 0.50 fiber-volume-ratio, HMSF/DX209 resin, quasi-isotropic (40/130/85/-5)_s laminate are modeled as follows: The temperature difference is selected as 200 F above reference temperature (70 F) by assigning a use temperature of 270 F while the cure temperature remains constant. The amount of moisture percent in the composite is 2 percent by weight. The laminate is subjected to an in-plane bending moment (free flexure) of $M_x = 2$ lb-in./in., and the thickness of each ply is 0.01 in. This example is illustrated in the following input data set:

```

$
$ This problem illustrates the hygrothermal effects on the flexural
$ SDC of a (TH/90+TH/45+TH/-45+TH)s laminate. The temperature differ-
$ ence is equal to 200 F and the moisture content is equal to 2 %.
$
ICAN/DAMP: Demonstration Problem No. 3
COMSAT      T
CSANB       F
BIDE        F
RINDV       F
NONUDF      T
DEFECT      F
$ Each ply is 0.01 inches thick and the fiber orientation angle is
$ equal to 40 degrees.
PLY         1      1  270.0   70.0    2.0   40.0   0.01
PLY         2      1  270.0   70.0    2.0  130.0   0.01
PLY         3      1  270.0   70.0    2.0   85.0   0.01
PLY         4      1  270.0   70.0    2.0   -5.0   0.01
PLY         5      1  270.0   70.0    2.0   -5.0   0.01
PLY         6      1  270.0   70.0    2.0   85.0   0.01
PLY         7      1  270.0   70.0    2.0  130.0   0.01
PLY         8      1  270.0   70.0    2.0   40.0   0.01
$ HMSF fiber in DX209 epoxy resin (0.50 fiber volume ratio).
MATCRD      IHMSFD209   0.50   0.00T300IMHS   0.00   0.00   0.00
FRICTN      0   IF: 1 - Include Friction Effects
TEMPRIS     0           1 - Temp's from Individual Ply Heat Generation
DAMPOUT     0           1 - Suspends Damping's Output Printout
FREQ        50.0
STRAINS     0.0      0.0      0.0
CURVTUR     0.0      0.0      0.0
PLY         1      0.00   0.00
PLY         2      0.00   0.00
PLY         3      0.00   0.00
PLY         4      0.00   0.00
PLY         5      0.00   0.00
PLY         6      0.00   0.00
PLY         7      0.00   0.00
PLY         8      0.00   0.00
$ In-plane bending moment of 2 lb in/in.
PMEMB       0.0      0.0      0.0      0.0
PBEND       2.0      0.0      0.0      0.0
PTRAN       0.0      0.0      0.      00.
$
PRINT      ALL      Output request for complete results (OPTION 0)

```

Lewis Research Center
 National Aeronautics and Space Administration
 Cleveland, Ohio, May 14, 1992

Appendix A.—Symbols

$[A_D], [A]$	3×3 extensional damping and stiffness matrices, respectively
$[C_D], [C]$	3×3 coupling damping and stiffness matrices, respectively
$[D_D], [D]$	3×3 flexural damping and stiffness matrices, respectively
C	thermal capacity
E	normal modulus
$[E_c]$	off-axis ply stiffness matrix
G	shear modulus
f	forcing frequency, Hz
K	thermal conductivity
k	volume ratio
N_{fb}	fraction of broken fibers in a ply
N_l	number of plies
S	strength
T	temperature
t	ply thickness
$W, \delta W$	stored and dissipated strain energies
z	distance from laminate midplane surface
α	thermal expansion coefficient
ϵ	engineering strain
ϵ^0	midplane engineering strain vector
κ	curvature vector
μ	fiber-matrix friction coefficient
ν	Poisson's ratio
ρ	mass density
σ	stress
ψ	specific damping capacity

Subscripts:

b	ply bottom
C	compression
c	(ply) off-axis composite
D	damping
f	fibers

l	(ply) on-axis composite
m	matrix
n	normal direction
o	reference
s	shear direction
t	ply top
x,y,z	structural axes
xx,yy	in-plane normal, off-axis, x and y directions, respectively
ss	in-plane shear, off-axis
1,2,3	material axes
11	normal longitudinal direction
22	normal in-plane transverse direction
33	normal out-of-plane transverse direction
12	shear in-plane direction
23,13	shear out-of-plane directions

Appendix B.—Sample ICAN/DAMP Input Data Set

```

$ --- Title Card --- Card Group I.
$
ICAN/DAMP:  QUASI-ISOTROPIC  LAMINATE,8 'PLIES,DT=000 F,M=0%
$
$ --- Boolean Card Group --- Card Group II.
$
COMSAT      T
CSANB       F
$ The logical variable BIDE is Not being used, (Interply Layer
$ Distortion Energy Coefficient (ILDC = 0)).
$ BIDE       F
$ RINDV      F
$ NONUDF     T
$ DEFECT     F
$
$ --- Laminate Configuration Card Group --- Card Group III.
$ The following is the PLY card group.  The laminate configuration is
$ specified as follows:
$
PLY      1      1      70.0      70.0      0.0      00.0      0.01
PLY      2      1      70.0      70.0      0.0      90.0      0.01
PLY      3      1      70.0      70.0      0.0      45.0      0.01
PLY      4      1      70.0      70.0      0.0      -45.0      0.01
PLY      5      1      70.0      70.0      0.0      -45.0      0.01
PLY      6      1      70.0      70.0      0.0      45.0      0.01
PLY      7      1      70.0      70.0      0.0      90.0      0.01
PLY      8      1      70.0      70.0      0.0      00.0      0.01
$
$ --- Material Data Card Group --- Card Group IV.
$ The details of the materials to be used in the analysis are
$ described as follows:
$
MATCRD      1HMSFD210      0.50      0.00T300IMHS      0.00      0.00      0.00
$
$ *****
$ *** Damping Analysis Card Groups. ***
$ The input data cards needed to perform the damping analysis are
$ specified below:
$
$ --- Damping Option Card Group --- Card Group V.
$
$ FRICTN      0      IP: 1 - Include Friction Effects
$ TEMPRIS      0      1 - Temp's from Individual Ply Heat Generation
$ DAMPOUT      0      1 - Suspends Damping's Output Printout
$
$ --- Forcing Frequency --- Card Group VI.
$
$ FREQ      50.0
$
$ --- Deformation --- Card Group VII.
$
$ STRAINS      0.0      0.0      0.0
$ CURVTUR      0.0      0.0      0.0
$
$ --- Friction Data, (MU and NFB) --- Card Group VIII.
$
$ PLY      1      0.30      0.20
$ PLY      2      0.30      0.20
$ PLY      3      0.30      0.20
$ PLY      4      0.30      0.20
$ PLY      5      0.30      0.20
$ PLY      6      0.30      0.20
$ PLY      7      0.30      0.20
$ PLY      8      0.30      0.20
$
$ *** END of Damping Analysis Card Groups. ***
$ *****
$
$ --- Loads Card Group --- Card Group IX.

```

```

$ In-plane Membrane Loads.
PMEB  00.0  00.    0.0  0.0
$ In-plane Bending Loads.
PBEND  2.0  0.0    0.0  0.0
$ Transverse Loads.
PTRAN  0.0  0.0    0.  00.
$
$ --- Cyclic or Fatigue Load Data Group --- Card Group X.
$ Loading for the Durability Analysis. Mechanical/Thermal Fatigue.
CNXX  200.  100.  100.  0.1
CNYY -50.  -100.  10.   0.1
CNXY  20.   10.  100.  0.2
CMXX  10.   5.   10.   0.01
CMYY  4.    2.   1000.  0.15
CMXY  2.    1.   100.   0.01
$
$ --- Output Selection Data Group --- Card Group XI.
$ The output can be tailor. OPTION 0 is the output request for
$ complete results.
$
PRINT  ALL  Output request for complete results  (OPTION 0)

```

Appendix C.—Sample Data Bank

FIBER PROPERTIES

T300 GRAPHITE FIBER.

\$

\$

\$

Number of fibers per end	Nf	3000	number
Filament equivalent diameter	df	0.300E-03	inches
Weight density	Rhof	0.640E-01	lb/in**3
Normal moduli (11)	Ef11	0.320E+08	psi
Normal moduli (22)	Ef22	0.200E+07	psi
Poisson's ratio (12)	Nuf12	0.200E+00	non-dim
Poisson's ratio (23)	Nuf23	0.250E+00	non-dim
Shear moduli (12)	Gf12	0.130E+07	psi
Shear moduli (23)	Gf23	0.700E+06	psi
Thermal expansion coef. (11)	Alfaf11	-.550E-06	in/in/F
Thermal expansion coef. (22)	Alfaf22	0.560E-05	in/in/F
Heat conductivity (11)	Kf11	0.403E+01	BTU-in/hr/in**2/F
Heat conductivity (22)	Kf22	0.403E+00	BTU-in/hr/in**2/F
Heat capacity	Cf	0.170E+00	BTU/lb/F
Fiber tensile strength	SfT	0.350E+06	psi
Fiber compressive strength	SfC	0.300E+06	psi
Fiber damping capacity (11)	Zetaf11	0.100E-02	non-dim
Fiber damping capacity (22)	Zetaf22	0.000E+00	non-dim
Fiber damping capacity (12)	Zetaf12	0.000E+00	non-dim
Fiber damping capacity (23)	Zetaf23	0.000E+00	non-dim

HMSF HIGH MODULUS SURFACE TREATED FIBER.

\$

\$

\$

Number of fibers per end	Nf	10000	number
Filament equivalent diameter	df	0.300E-03	inches
Weight density	Rhof	0.703E-01	lb/in**3
Normal moduli (11)	Ef11	0.550E+08	psi
Normal moduli (22)	Ef22	0.900E+06	psi
Poisson's ratio (12)	Nuf12	0.200E+00	non-dim
Poisson's ratio (23)	Nuf23	0.250E+00	non-dim
Shear moduli (12)	Gf12	0.110E+07	psi
Shear moduli (23)	Gf23	0.700E+06	psi
Thermal expansion coef. (11)	Alfaf11	-.550E-06	in/in/F
Thermal expansion coef. (22)	Alfaf22	0.560E-05	in/in/F
Heat conductivity (11)	Kf11	0.403E+01	BTU-in/hr/in**2/F
Heat conductivity (22)	Kf22	0.403E+00	BTU-in/hr/in**2/F
Heat capacity	Cf	0.170E+00	BTU/lb/F
Fiber tensile strength	SfT	0.280E+06	psi
Fiber compressive strength	SfC	0.200E+06	psi
Fiber damping capacity (11)	Zetaf11	0.400E-02	non-dim
Fiber damping capacity (22)	Zetaf22	0.400E-02	non-dim
Fiber damping capacity (12)	Zetaf12	0.400E-02	non-dim
Fiber damping capacity (23)	Zetaf23	0.400E-02	non-dim

HT-S

\$

\$

\$

Number of fibers per end	Nf	10000	number
Filament equivalent diameter	df	0.300E-03	inches
Weight density	Rhof	0.640E-01	lb/in**3
Normal moduli (11)	Ef11	0.320E+08	psi
Normal moduli (22)	Ef22	0.250E+07	psi
Poisson's ratio (12)	Nuf12	0.200E+00	non-dim
Poisson's ratio (23)	Nuf23	0.250E+00	non-dim
Shear moduli (12)	Gf12	0.150E+07	psi
Shear moduli (23)	Gf23	0.100E+07	psi
Thermal expansion coef. (11)	Alfaf11	-.550E-06	in/in/F
Thermal expansion coef. (22)	Alfaf22	0.560E-05	in/in/F
Heat conductivity (11)	Kf11	0.403E+01	BTU-in/hr/in**2/F

Heat conductivity (22)	Kf22	0.403E+00	BTU-in/hr/in**2/F
Heat capacity	Cf	0.170E+00	BTU/lb/F
Fiber tensile strength	SfT	0.350E+06	psi
Fiber compressive strength	SfC	0.300E+06	psi
Fiber damping capacity (11)	Zetaf11	0.700E-02	non-dim
Fiber damping capacity (22)	Zetaf22	0.700E-02	non-dim
Fiber damping capacity (12)	Zetaf12	0.600E-02	non-dim
Fiber damping capacity (23)	Zetaf23	0.600E-02	non-dim

KEVL KEVLAR FIBER.

\$

\$

\$

Number of fibers per end	Nf	580	number
Filament equivalent diameter	df	0.460E-03	inches
Weight density	Rhof	0.530E-01	lb/in**3
Normal moduli (11)	Ef11	0.220E+08	psi
Normal moduli (22)	Ef22	0.600E+06	psi
Poisson's ratio (12)	Nuf12	0.350E+00	non-dim
Poisson's ratio (23)	Nuf23	0.350E+00	non-dim
Shear moduli (12)	Gf12	0.420E+06	psi
Shear moduli (23)	Gf23	0.220E+06	psi
Thermal expansion coef. (11)	Alfaf11	-.220E-05	in/in/F
Thermal expansion coef. (22)	Alfaf22	0.300E-04	in/in/F
Heat conductivity (11)	Kf11	0.118E-01	BTU-in/hr/in**2/F
Heat conductivity (22)	Kf22	0.118E-01	BTU-in/hr/in**2/F
Heat capacity	Cf	0.250E+00	BTU/lb/F
Fiber tensile strength	SfT	0.400E+06	psi
Fiber compressive strength	SfC	0.750E+05	psi
Fiber damping capacity (11)	Zetaf11	0.180E-01	non-dim
Fiber damping capacity (22)	Zetaf22	0.180E-01	non-dim
Fiber damping capacity (12)	Zetaf12	0.180E-01	non-dim
Fiber damping capacity (23)	Zetaf23	0.180E-01	non-dim

EGLA E-GLASS FIBER.

\$

\$

\$

Number of fibers per end	Nf	204	number
Filament equivalent diameter	df	0.360E-03	inches
Weight density	Rhof	0.900E-01	lb/in**3
Normal moduli (11)	Ef11	0.105E+08	psi
Normal moduli (22)	Ef22	0.105E+08	psi
Poisson's ratio (12)	Nuf12	0.200E+00	non-dim
Poisson's ratio (23)	Nuf23	0.200E+00	non-dim
Shear moduli (12)	Gf12	0.437E+07	psi
Shear moduli (23)	Gf23	0.437E+07	psi
Thermal expansion coef. (11)	Alfaf11	0.280E-05	in/in/F
Thermal expansion coef. (22)	Alfaf22	0.280E-05	in/in/F
Heat conductivity (11)	Kf11	0.521E-01	BTU-in/hr/in**2/F
Heat conductivity (22)	Kf22	0.521E-01	BTU-in/hr/in**2/F
Heat capacity	Cf	0.170E+00	BTU/lb/F
Fiber tensile strength	SfT	0.360E+06	psi
Fiber compressive strength	SfC	0.360E+06	psi
Fiber damping capacity (11)	Zetaf11	0.110E-01	non-dim
Fiber damping capacity (22)	Zetaf22	0.110E-01	non-dim
Fiber damping capacity (12)	Zetaf12	0.600E-02	non-dim
Fiber damping capacity (23)	Zetaf23	0.600E-02	non-dim

OVER END OF FIBER PROPERTIES

MATRIX PROPERTIES

LMLS LOW MODULUS LOW STRENGTH MATRIX.

\$

\$

\$

Weight density	Rhom	0.420E-01	lb/in**3
Normal modulus	Em	0.320E+06	psi
Poisson's ratio	Num	0.430E+00	non-dim

Thermal expansion coef.	Alfa m	0.570E-04	in/in/F
Matrix heat conductivity	Km	0.868E-02	BTU-in/hr/in**2/F
Heat capacity	Cm	0.250E+00	BTU/lb/F
Matrix tensile strength	SmT	0.800E+04	psi
Matrix compressive strength	SmC	0.150E+05	psi
Matrix shear strength	SmS	0.800E+04	psi
Allowable tensile strain	eps mT	0.810E-01	in/in
Allowable compr. strain	eps mC	0.150E+00	in/in
Allowable shear strain	eps mS	0.100E+00	in/in
Allowable torsional strain	eps mTOR	0.100E+00	in/in
Void heat conductivity	kv	0.225E+00	BTU-in/hr/in**2/F
Glass transition temperature	Tgdr	0.350E+03	F
Matrix damp. capacity-Normal	Zeta mn	0.850E-01	non-dim
Matrix damp. capacity-Shear	Zeta ms	0.138E+00	non-dim

IMLS INTER. MODULUS LOW STRENGTH (SIMILAR TO 3508)

\$

\$

\$

Weight density	Rhom	0.460E-01	lb/in**3
Normal modulus	Em	0.500E+06	psi
Poisson's ratio	Num	0.410E+00	non-dim
Thermal expansion coef.	Alfa m	0.570E-04	in/in/F
Matrix heat conductivity	Km	0.868E-02	BTU-in/hr/in**2/F
Heat capacity	Cm	0.250E+00	BTU/lb/F
Matrix tensile strength	SmT	0.700E+04	psi
Matrix compressive strength	SmC	0.210E+05	psi
Matrix shear strength	SmS	0.700E+04	psi
Allowable tensile strain	eps mT	0.140E-01	in/in
Allowable compr. strain	eps mC	0.420E-01	in/in
Allowable shear strain	eps mS	0.320E-01	in/in
Allowable torsional strain	eps mTOR	0.320E-01	in/in
Void heat conductivity	kv	0.225E+00	BTU-in/hr/in**2/F
Glass transition temperature	Tgdr	0.420E+03	F
Matrix damp. capacity-Normal	Zeta mn	0.850E-01	non-dim
Matrix damp. capacity-Shear	Zeta ms	0.138E+00	non-dim

IMHS INTERMEDIATE MODULUS HIGH STRENGTH MATRIX.

\$

\$

\$

Weight density	Rhom	0.440E-01	lb/in**3
Normal modulus	Em	0.500E+06	psi
Poisson's ratio	Num	0.350E+00	non-dim
Thermal expansion coef.	Alfa m	0.360E-04	in/in/F
Matrix heat conductivity	Km	0.868E-02	BTU-in/hr/in**2/F
Heat capacity	Cm	0.250E+00	BTU/lb/F
Matrix tensile strength	SmT	0.150E+05	psi
Matrix compressive strength	SmC	0.350E+05	psi
Matrix shear strength	SmS	0.130E+05	psi
Allowable tensile strain	eps mT	0.200E-01	in/in
Allowable compr. strain	eps mC	0.500E-01	in/in
Allowable shear strain	eps mS	0.350E-01	in/in
Allowable torsional strain	eps mTOR	0.350E-01	in/in
Void heat conductivity	kv	0.225E+00	BTU-in/hr/in**2/F
Glass transition temperature	Tgdr	0.420E+03	F
Matrix damp. capacity-Normal	Zeta mn	0.660E-01	non-dim
Matrix damp. capacity-Shear	Zeta ms	0.690E-01	non-dim

D209 DX209 RESIN

\$

\$

\$

Weight density	Rhom	0.440E-01	lb/in**3
Normal modulus	Em	0.500E+06	psi
Poisson's ratio	Num	0.350E+00	non-dim
Thermal expansion coef.	Alfa m	0.360E-04	in/in/F
Matrix heat conductivity	Km	0.868E-02	BTU-in/hr/in**2/F
Heat capacity	Cm	0.250E+00	BTU/lb/F
Matrix tensile strength	SmT	0.150E+05	psi

Matrix compressive strength	SmC	0.350E+05	psi
Matrix shear strength	SmS	0.130E+05	psi
Allowable tensile strain	eps mT	0.200E-01	in/in
Allowable compr. strain	eps mC	0.500E-01	in/in
Allowable shear strain	eps mS	0.350E-01	in/in
Allowable torsional strain	eps mTOR	0.350E-01	in/in
Void heat conductivity	kv	0.225E+00	BTU-in/hr/in**2/F
Glass transition temperature	Tgdr	0.420E+03	F
Matrix damp. capacity-Normal	Zeta mn	0.172E+00	non-dim
Matrix damp. capacity-Shear	Zeta ms	0.168E+00	non-dim

D210 DX210 RESIN

\$

\$

\$

Weight density	Rhom	0.440E-01	lb/in**3
Normal modulus	Em	0.500E+06	psi
Poisson's ratio	Num	0.350E+00	non-dim
Thermal expansion coef.	Alfa m	0.360E-04	in/in/F
Matrix heat conductivity	Km	0.868E-02	BTU-in/hr/in**2/F
Heat capacity	Cm	0.250E+00	BTU/lb/F
Matrix tensile strength	SmT	0.150E+05	psi
Matrix compressive strength	SmC	0.350E+05	psi
Matrix shear strength	SmS	0.130E+05	psi
Allowable tensile strain	eps mT	0.200E-01	in/in
Allowable compr. strain	eps mC	0.500E-01	in/in
Allowable shear strain	eps mS	0.350E-01	in/in
Allowable torsional strain	eps mTOR	0.350E-01	in/in
Void heat conductivity	kv	0.225E+00	BTU-in/hr/in**2/F
Glass transition temperature	Tgdr	0.420E+03	F
Matrix damp. capacity-Normal	Zeta mn	0.103E+00	non-dim
Matrix damp. capacity-Shear	Zeta ms	0.118E+00	non-dim

OVER END OF MATRIX PROPERTIES

Appendix D.—Sample Damping Module Output

DAMPING ANALYSIS OF COMPOSITE LAMINATES

SUPRESSED OUTPUT OPTIONS:

- FRICTION EFFECT ON ZETAL11
- TEMPERATURE PROFILES BASED ON INDIVIDUAL PLY DISSIPATION

** ON - A X I S D A M P I N G **

MATERIAL SYSTEM 1: (HMSF/D210 @ DT= 0.00, M=0.00)

FIBER DAMPING CAPACITY (HMSF) :

ZF11 =	0.4000E-02
ZF12 =	0.4000E-02
ZF13 =	0.4000E-02
ZF22 =	0.4000E-02
ZF23 =	0.4000E-02
ZF33 =	0.4000E-02

MATRIX DAMPING CAPACITY (D210) :

ZMN =	0.1030E+00
ZMS =	0.1180E+00

COMPOSITE DAMPING CAPACITY (W/O FRICTION):

ZL11 =	0.4892E-02
ZL12 =	0.7041E-01
ZL13 =	0.7041E-01
ZL21 =	0.7041E-01
ZL22 =	0.4202E-01
ZL23 =	0.4817E-01
ZL31 =	0.7041E-01
ZL32 =	0.4817E-01
ZL33 =	0.4202E-01

 ** O F F - A X I S D A M P I N G **

		PLY # 1 HMSF/D210 0.0 DEG	PLY # 2 HMSF/D210 90.0 DEG	PLY # 3 HMSF/D210 45.0 DEG	PLY # 4 HMSF/D210 -45.0 DEG
DAMPING MATRIX:	ZCXX	0.4892E-02	0.4202E-01	0.4693E-01	0.4693E-01
	ZCXY	0.0000E+00	-.1509E-12	-.2347E-01	-.2347E-01
	ZCXS	0.0000E+00	0.3598E-07	-.9283E-02	0.9283E-02
	ZCYX	0.0000E+00	-.1509E-12	-.2347E-01	-.2347E-01
	ZCYY	0.4202E-01	0.4892E-02	0.4693E-01	0.4693E-01
	ZCYS	0.0000E+00	-.8304E-07	-.9283E-02	0.9283E-02
	ZCSX	0.0000E+00	0.7195E-07	-.1857E-01	0.1857E-01
	ZCSY	0.0000E+00	-.1661E-06	-.1857E-01	0.1857E-01
	ZCSS	0.7041E-01	0.7041E-01	0.2346E-01	0.2346E-01
AXIAL DAMPING:	ZCAXLX	0.4892E-02	0.4202E-01	0.5923E-01	0.5923E-01
	ZCAXLY	0.4202E-01	0.4892E-02	0.5923E-01	0.5923E-01
	ZCAXLS	0.7041E-01	0.7041E-01	0.4083E-01	0.4083E-01

		PLY # 5 HMSF/D210 -45.0 DEG	PLY # 6 HMSF/D210 45.0 DEG	PLY # 7 HMSF/D210 90.0 DEG	PLY # 8 HMSF/D210 0.0 DEG
DAMPING MATRIX:	ZCXX	0.4693E-01	0.4693E-01	0.4203E-01	0.4892E-02
	ZCXY	-.2347E-01	-.2347E-01	-.1509E-12	0.0000E+00
	ZCXS	0.9283E-02	-.9283E-02	0.3598E-07	0.0000E+00
	ZCYX	-.2347E-01	-.2347E-01	-.1509E-12	0.0000E+00
	ZCYY	0.4693E-01	0.4693E-01	0.4892E-02	0.4202E-01
	ZCYS	0.9283E-02	-.9283E-02	-.8304E-07	0.0000E+00
	ZCSX	0.1857E-01	-.1857E-01	0.7195E-07	0.0000E+00
	ZCSY	0.1857E-01	-.1857E-01	-.1661E-06	0.0000E+00
	ZCSS	0.2346E-01	0.2346E-01	0.7041E-01	0.7041E-01
AXIAL DAMPING:	ZCAXLX	0.5923E-01	0.5923E-01	0.4202E-01	0.4892E-02
	ZCAXLY	0.5923E-01	0.5923E-01	0.4892E-02	0.4202E-01
	ZCAXLS	0.4083E-01	0.4083E-01	0.7041E-01	0.7041E-01

** L A M I N A T E D A M P I N G **

---> LAMINATE MECHANICAL STRAINS <---

MIDPLANE STRAIN, {E0}	CURVATURE, {K}
E01 = 0.1989E-10	K1 = 0.2777E-02
E02 = -0.2072E-10	K2 = -0.2107E-03
E03 = 0.1596E-10	K3 = -0.1279E-02

SPECIFIC DAMPING CAPACITY = 0.601601601E-02
FOR ABOVE STRAINS.

DISSIPATED STRAIN ENERGY = 0.167041144E-04
(PER AREA-CYCLE)
STORED STRAIN ENERGY = 0.277660601E-02
(PER AREA-CYCLE)

---> LAMINATE DAMPING MATRICES <---

EXTENSIONAL DAMPING: {ACD}			COUPLING DAMPING: {BCD}		
0.6362E+04	0.6840E+03	0.8377E-03	0.1526E-04	0.4768E-05	0.1514E-06
0.6840E+03	0.6362E+04	0.1623E-02	0.4411E-05	0.1526E-04	0.3414E-06
0.1009E-02	0.1642E-02	0.2839E+04	0.6083E-06	0.7982E-06	0.4005E-04

COUPLING DAMPING: {CCD}			FLEXURAL DAMPING: {DCD}		
0.1526E-04	0.4768E-05	0.1514E-06	0.4148E+01	0.2868E+00	0.9786E-01
0.4411E-05	0.1526E-04	0.3414E-06	0.1973E+00	0.2884E+01	0.9786E-01
0.6083E-06	0.7982E-06	0.4005E-04	0.1128E+00	0.1128E+00	0.1391E+01

 ** P L Y T E M P E R A T U R E D I S T R I B U T I O N **

FREQUENCY (HZ) = 50.00

PLY	INITIAL TEMP (T0) (DEG. F)	T - T0 (AVERAGE) (DEG. F)	T - T0 (BOTTOM) (DEG. F)	T - T0 (TOP) (DEG. F)
1	70.000	0.000	0.000	0.000
2	70.000	0.001	0.000	0.001
3	70.000	0.001	0.001	0.001
4	70.000	0.001	0.001	0.001
5	70.000	0.001	0.001	0.001
6	70.000	0.001	0.001	0.001
7	70.000	0.001	0.001	0.000
8	70.000	0.000	0.000	0.000

 E N D O F D A M P I N G A N A L Y S I S

Appendix E.—Files for Compiling and Executing ICAN/DAMP Under VM/SP Operating System and VAX/VMS Environment

"REXX EXEC" file for compiling ICAN/DAMP under VM/SP Operating System.

```
/* COMPILE EXEC */
ARG phylen phyttyp phymod junk
"set cmstype ht"
FORTVS2 phylen "(MAP FLAG (E) opt(2) NOPRINT"
rcode = rc
if rcode = 4 then rcode = 0
"set cmstype rt"
load phylen "(clear"
genmod phylen
erase phylen text phymod
exit rcode
```

"REXX EXEC" file for executing ICAN/DAMP under VM/SP Operating System.

```
/* X-----X */
/* X X */
/* X ICAN/DAMP EXEC X */
/* X X */
/* X This is a REXX EXEC file to run ICAN/DAMP X */
/* X File unit 7 is for INHYD. X */
/* X File unit 5 is for Input. X */
/* X File unit 8 is for Data Bank. X */
/* X File unit 6 is for Output. X */
/* X X */
/* X Fortran code filename: "icndamp". X */
/* X Data bank filename: "tbledam". X */
/* X X */
/* X NOTE: The data bank filename is specified X */
/* X in subroutine OPENFL. X */
/* X-----X */
parse arg fn fm ft fout .
if fout = " " then fout = "dampout"
"FILEDEF FT07F001 DISK JUNK DAT D1 (LRECL 132 XTENT 9999"
"FILEDEF FT05F001 DISK "fn" DATA D1"
"FILEDEF FT06F001 DISK "fout" LISTING D1 (LRECL 132 XTENT 9999"
"icndamp"
"fil * clear"
"ERASE JUNK DAT D1"
exit rc
```


DCL Command Procedures File for executing ICAN/DAMP under VAX/VMS Operating System.

```
$! -----
$!          COM FILE FOR THE EXECUTION OF ICAN/DAMP ON VAX
$! -----
$!
$!          Input files
$ assign icninp.dat  for005
$ assign junk.dat    for007
$! NOTE:  The data bank file is specified
$! in subroutine OPENFL.
$!          Output files
$ assign dampout.dat for006
$ assign sys$output  for001
$!          run icndmp.exe
$ run icndmp
$!
$ delete junk.dat;*
$ exit
```

Appendix F.—On-Axis Damping, Off-Axis Damping, and Laminate Damping Equations

Damping Micromechanics

Longitudinal normal ply SDC ψ_{111} :

$$\psi_{111} = \psi_{f11} k_f \frac{E_{f11}}{E_{111}} + \psi_{mn} k_m \frac{E_m}{E_{111}} \quad (1)$$

Transverse normal ply SDC's ψ_{122} , ψ_{133} :

$$\psi_{122} = \psi_{f22} \sqrt{k_f} \frac{E_{22}}{E_{f22}} + \psi_{mn} (1 - \sqrt{k_f}) \frac{E_{22}}{E_m} \quad (2)$$

$$\psi_{133} = \psi_{122} \quad (3)$$

where

$$E_{22} = (1 - \sqrt{k_f}) E_m + \frac{\sqrt{k_f} E_m}{1 - \sqrt{k_f} [1 - (E_m/E_{f22})]} \quad (4)$$

In-plane shear ply SDC ψ_{112} :

$$\psi_{112} = \psi_{f12} \sqrt{k_f} \frac{G_{12}}{G_{f12}} + \psi_{ms} (1 - \sqrt{k_f}) \frac{G_{12}}{G_m} \quad (5)$$

where

$$G_{12} = (1 - \sqrt{k_f}) G_m + \frac{\sqrt{k_f} G_m}{1 - \sqrt{k_f} [1 - (G_m/G_{f12})]} \quad (6)$$

Out-of-plane shear ply SDC's ψ_{123} , ψ_{113} :

$$\psi_{123} = \psi_{f23} \sqrt{k_f} \frac{G_{123}}{G_{f23}} + \psi_{ms} (1 - \sqrt{k_f}) \frac{G_{123}}{G_m} \quad (7)$$

$$\psi_{113} = \psi_{112} \quad (8)$$

where

$$G_{123} = \frac{E_{122}}{2(1 + \nu_{123})} \quad (9)$$

$$E_{122} = \frac{E_m}{1 - \sqrt{k_f} [1 - (E_m/E_{f22})]} \quad (10)$$

$$\nu_{123} = \frac{\nu_m}{1 - k_f \nu_m} + k_f \left[\nu_{f23} - \frac{(1 - k_f) \nu_m}{1 - k_f \nu_m} \right] \quad (11)$$

In-Plane Damping

Off-axis composite damping $[\psi_c]$:

$$[\psi_c] = [R_\sigma]^T [\psi_l] [R_\sigma^{-1}]^T \quad (12)$$

where

$$[R_\sigma] = \begin{bmatrix} \cos^2 \theta & \sin^2 \theta & \sin 2\theta \\ \sin^2 \theta & \cos^2 \theta & -\sin 2\theta \\ -0.5 \sin 2\theta & 0.5 \sin 2\theta & \cos 2\theta \end{bmatrix} \quad (13)$$

On-axis damping matrix $[\psi_l]$

$$[\psi_1] = \begin{bmatrix} \psi_{111} & 0 & 0 \\ 0 & \psi_{122} & 0 \\ 0 & 0 & \psi_{112} \end{bmatrix} \quad (14)$$

hence, the off-axis damping matrix is:

$$[\psi_c] = \begin{bmatrix} \psi_{cxx} & \psi_{cxy} & \psi_{cxs} \\ \psi_{cyx} & \psi_{cyy} & \psi_{cys} \\ \psi_{csx} & \psi_{csy} & \psi_{css} \end{bmatrix} \quad (15)$$

Laminate Damping

Extensional Damping Matrix $[A_D]$:

$$[A_D] = \sum_{i=1}^{N_l} (z_t - z_b)_i [E_c]_i [\psi_c]_i \quad (16)$$

Coupling Damping Matrix $[C_D]$:

$$[C_D] = \sum_{i=1}^{N_l} \frac{1}{2} (z_t^2 - z_b^2)_i [E_c]_i [\psi_c]_i \quad (17)$$

Flexural Damping Matrix $[D_D]$:

$$[D_D] = \sum_{i=1}^{N_l} \frac{1}{3} (z_t^3 - z_b^3)_i [E_c]_i [\psi_c]_i \quad (18)$$

where

$$[E_c]^{-1} = \begin{bmatrix} \frac{1}{E_{cxx}} & -\frac{\nu_{cyx}}{E_{cyy}} & -\frac{\nu_{csx}}{G_{cxy}} \\ -\frac{\nu_{cxy}}{E_{cxx}} & \frac{1}{E_{cyy}} & -\frac{\nu_{csy}}{G_{cxy}} \\ \frac{\nu_{cxs}}{E_{cxx}} & \frac{\nu_{cys}}{E_{cyy}} & \frac{1}{G_{cxy}} \end{bmatrix} \quad (19)$$

Dissipated Strain Energy (Per area-cycle) δW :

$$\delta W = \frac{1}{2} \boldsymbol{\epsilon}^o \boldsymbol{\kappa} \begin{bmatrix} [A_D] & [C_D] \\ [C_D] & [D_D] \end{bmatrix} \begin{Bmatrix} \boldsymbol{\epsilon}^o \\ \boldsymbol{\kappa} \end{Bmatrix} \quad (20)$$

Stored Strain Energy (Per area-cycle) W :

$$W = \frac{1}{2} \boldsymbol{\epsilon}^o \boldsymbol{\kappa} \begin{bmatrix} [A] & [C] \\ [C] & [D] \end{bmatrix} \begin{Bmatrix} \boldsymbol{\epsilon}^o \\ \boldsymbol{\kappa} \end{Bmatrix} \quad (21)$$

Laminate SDC ψ :

$$\psi = \frac{\delta W}{W} \quad (22)$$

Appendix G.—Damping Module Structure

Subroutine DAMP is the main subroutine of the damping module and is called from subroutine ICANSB of the main ICAN/DAMP code. A brief description of the module's basic subroutines is given as follows:

- (1) Subroutine DBNKR2—This subroutine reads the data base of constituent materials and retrieves the fiber and matrix specific damping capacities.
- (2) Subroutine ORTDMP—Calculates the on-axis ply damping capacities from the basic composite material constituent properties and fiber content (micromechanics).
- (3) Subroutine LAMDMP—Calculates the off-axis SDC's of each ply, the laminate damping matrices $[A_D]$, $[C_D]$, and $[D_D]$, and the temperature rise (optional) based on the individual strain energy dissipation in each ply.
- (4) Subroutine LAMLOS—Calculates the laminate SDC for a given local deformation and the temperature rise through-the-thickness based on the average strain energy loss.

References

1. Murthy P.L.N.; and Chamis C.C.: Integrated Composite Analyzer (ICAN): Users and Programmers Manual. NASA TP-2515, 1986.
2. Murthy P.L.N.; Ginty C.A.; and Sanfeliz J.G.: Second Generation Integrated Composite Analyzer (ICAN) Computer Code. NASA TP-3290, 1992.
3. Saravanos D.A.; and Chamis C.C.: Unified Micromechanics of Damping for Unidirectional and Off-Axis Fiber Composites. J. Compos. Technol. Res., vol. 12, no. 1, 1990, pp. 31-40.
4. Saravanos D.A.; and Chamis C.C.: Mechanics of Damping for Fiber Composite Laminates Including Hygrothermal Effects. AIAA J., vol. 28, no. 10, Oct. 1990, pp. 1813-1819.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE November 1992	3. REPORT TYPE AND DATES COVERED Technical Publication		
4. TITLE AND SUBTITLE ICAN/Damp-Integrated Composite Analyzer With Damping Analysis Capabilities-Users Manual		5. FUNDING NUMBERS WU-505-63-53		
6. AUTHOR(S) Dimitrious A. Saravanos and Jose G. Sanfeliz				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Lewis Research Center Cleveland, Ohio 44135-3191		8. PERFORMING ORGANIZATION REPORT NUMBER E-6898		
9. SPONSORING/MONITORING AGENCY NAMES(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, D.C. 20546-0001		10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TP-3292		
11. SUPPLEMENTARY NOTES This report is a companion to NASA TP-3290, "Second Generation Integrated Composite Analyzer (ICAN) Computer Code." Jose G. Sanfeliz, NASA Lewis Research Center; Dimitrious A. Saravanos, Ohio Aerospace Institute, 2001 Aerospace Parkway, Brook Park, Ohio 44142 and Resident Research Associate at NASA Lewis Research Center. Responsible person, Jose G. Sanfeliz, (216) 433-3348.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Category 24			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) This manual describes the use of the computer code ICAN/DAMP (Integrated Composite Analyzer with Damping Analysis Capabilities) for the prediction of damping in polymer-matrix composites. The code is written in FORTRAN 77 and is a version of the ICAN (Integrated Composite Analyzer) computer program. The code incorporates a new module for synthesizing the material damping from micromechanics to laminate level. Explicit micromechanics equations based on hysteretic damping are programmed relating the on-axis damping capacities to the fiber and matrix properties and fiber volume ratio. The damping capacities of unidirectional composites subjected to off-axis loading are synthesized from on-axis damping values. The hygrothermal effect on the damping performance of unidirectional composites caused by temperature and moisture variation is modeled along with the damping contributions from interfacial friction between broken fibers and matrix. The temperature rise in continuously vibrating composite plies and composite laminates is also estimated. The ICAN/DAMP users manual provides descriptions of the damping analysis module's functions, structure, input requirements, output interpretation, and execution requirements. It only addresses the changes required to conduct the damping analysis and is used in conjunction with the "Second Generation Integrated Composite Analyzer (ICAN) Computer Code" users manual (NASA TP-3290).				
14. SUBJECT TERMS Composite materials; Polymer-matrix composites; Laminates; Damping; Temperature; Moisture; Frequencies; Friction			15. NUMBER OF PAGES 40	
			16. PRICE CODE A03	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	